



2016 Collegiate Design Series

SAE Aero Design
East and West
Rules

Forward

Hello everyone and welcome to SAE Aero Design 2016! One of my greatest pleasures in life has been to be associated with this event for the last eleven years. This year will be one of the most exciting since we are introducing new changes to Advance Class that will make for an even more exciting event. The biggest change is the addition of multiple payload drops per flight. The payload packages are still standardized but you get to decide how many packages your aircraft can carry and safely drop. Can you imagine the center of gravity shifts from releasing so much weight? Hint...CG is much more critical than ever before so read the section on new CG requirements carefully. As usual, the forum is available for questions.

Also changing is the way scoring is calculated for Advanced Class. Understanding how the equations work is critical for your strategy. There are also some small but very important changes to the Data Acquisition System and Ground Station requirements that will need to be observed and implemented.

One of the lessons learned from the last three years concerning this class is the level of preparedness or completion some Advance Class aircraft arrived to competition. We believe that in dropping sand on a target for three years, teams have figured out what works or doesn't work so we expect a higher level of design and preparedness for this class. All Advance Class aircraft will now be required to have flown successfully, perform payload drop, and landed safely. This requirement must be recorded on video and must be reviewed by SAE officials during Technical and Safety Inspection prior to the aircraft competing in the event. The rules contain the video requirements that must be observed in order for us to accept your video proof.

Didn't I say there were big changes? I know that most of you are all up to the new challenge...that's why we made changes. There are tons of other changes that will only be revealed by careful reading. Miss one of them and you might not be able to compete...no kidding.

Outside of Advance Class, we have rewritten the rules format. It should provide for easier reading and comprehension. More diagrams have been added for better comprehension and clarity...for knuckle draggers "like myself" that need them. I admit that I am one of those guys that just look at the picture on the box and throw the instructions away. Don't do that here...trust me on that. Scan Regular and Micro Classes for small changes.

One last bit of advice...read the rules until you are VERY familiar with them...then read them again. The bar has now been raised. Are you up to the challenge?

Oliver Alvarado
SAE Aero Design Rules Committee Member

TABLE OF CONTENTS

1	Competition Requirements	1
1.1	Introduction	1
1.2	SAE Aero Design Rules and Organizer Authority	1
1.	General Authority.....	1
2.	Penalties	1
3.	Rules Authority	1
4.	Rules Validity	2
5.	Rules Compliance	2
6.	Understanding the Rules	2
7.	Loopholes	2
8.	Participating in the Competition	2
9.	Visa--United States Visas	2
10.	Letters of Invitation	3
11.	Certificates of Participation	3
12.	Violations of Intent	3
13.	Right to Impound.....	3
1.3	Society Membership and Eligibility.....	3
1.	Society Membership.....	3
2.	Team Pilots	3
1.4	Liability Waiver and Insurance Requirements	3
1.5	Ringers Prohibited	3
1.6	Design and Fabrication	4
1.7	Original Design	4
1.8	Official Languages.....	4
1.9	Unique Designs.....	5
1.10	Aircraft Classification/Duplicate Aircraft	5
1.	One Aircraft per class	5
2.	Backup Aircraft	5
3.	Scoring with Backup Aircraft	5
1.11	Aircraft Eligibility	5
1.12	Registration Information, Deadlines and Waitlist (NEW)	6
1.	Team/Class/University Policy	6

2.	Individual Registration Requirements – ACTION REQUIRED.....	6
1.13	Waitlist	7
1.14	New Policy Deadline	7
1.	Failure to meet deadlines.....	7
2.	Late Submission Penalty.....	7
3.	Automatic withdrawal Policy.....	7
1.15	Faculty Advisor	8
1.16	Questions, Complaints and Appeals.....	8
1.	Questions	8
2.	Complaints	8
3.	Appeal / Preliminary Review.....	8
4.	Cause for Appeal	8
5.	Appeal Format.....	9
6.	Appeals Period.....	9
7.	Appeals Committee	9
1.17	Professional Conduct.....	9
1.	Unsportsmanlike Conduct.....	9
2.	Arguments with Officials	9
3.	Alcohol and Illegal Material	10
4.	Organizer’s Authority	10
5.	Ground Safety and Flight Line Safety Equipment	10
1.18	SAE Technical Standards Access	10
2	General Aircraft Requirements.....	11
2.1	Aircraft Identification	11
2.2	No lighter-than-air or rotary wing aircraft.....	11
2.3	Empty CG design requirement and Empty CG markings on aircraft.....	11
2.4	Gross Weight Limit	11
2.5	Controllability	12
2.6	Radio Control System	12
2.7	Spinners or Safety Nuts Required.....	12
2.8	Metal propellers.....	12
2.9	Lead is prohibited.....	12
2.10	Payload Distribution	12

2.11	Aircraft Ballast	12
2.12	Stored Energy Restriction	12
2.13	Control Surface Slope	12
2.14	Servo Sizing.....	12
2.15	Clevis Keepers.....	12
2.16	Red Arming Plug	13
2.17	Repairs, Alterations, and Spares.....	13
2.18	Alteration after First Flight	13
2.19	Competition Supplied Fuel	13
3	Mission Requirements.....	14
3.1	Round Attempt.....	14
3.2	Engine or motor run-up before takeoff.....	14
3.3	Aircraft configuration at liftoff and during the flight attempt	14
3.4	Competition Circuit Requirements	14
3.5	Time Limits and Multiple Flight Attempts.....	15
3.6	Take-off	15
3.7	Landing.....	16
3.8	Landing Zone	16
1.	Allowed during Landing.....	16
2.	Not Allowed during Landing	16
3.9	Grounding an Aircraft.....	16
3.10	No-Fly Zone	17
3.11	Flight Rules Announcement	17
3.12	Flight Rules Violations	17
3.13	Local Field Rules	17
4	Design Report.....	18
4.1	Submission Deadlines.....	18
4.2	Design Report Requirements.....	18
4.3	2D Drawings	19
1.	2D Format and Size	19
2.	Markings Required	19
3.	Views Required.....	19
4.	Dimensions Required	19

5.	Summary Data Information Required.....	19
6.	Weight and Balance Information.....	19
4.4	Tech Data Sheet: Payload Prediction (Regular Class Only)	20
1.	Curve Requirements:.....	20
4.5	Tech Data Sheet: Radio Link Budget (Advanced Class Only).....	21
4.6	Tech Data Sheet: Weight Buildup (Micro Class Only)	21
5	Technical Presentation	22
5.1	Technical Presentation Requirements.....	22
5.2	Regular Class Payload Loading and Unloading Demonstration	22
5.3	Technical Presentation Process and Procedures	23
6	Technical Inspection.....	24
6.1	Aircraft Conformance to 2D drawing	24
6.2	Deviations from 2D drawing.....	24
6.3	Failure to report design changes	24
6.4	Safety and airworthiness of aircraft	25
6.5	Inspection of spare aircraft and spare aircraft components.	25
6.6	Aircraft must meet all inspection requirements throughout the competition.....	25
6.7	Technical and safety inspection penalties	25
7	Regular Class Design Requirements	26
7.1	Aircraft Dimension Requirement.....	26
7.2	Material and equipment restrictions for Regular class.....	26
1.	Fiber-Reinforced Plastic (FRP)	26
2.	Fiber-Reinforced Plastic (FRP) (Exceptions).....	26
3.	Rubber bands	26
4.	Stability Assistance	26
7.3	Aircraft System Requirements.....	27
1.	Electric Motor Requirements	27
2.	Gear boxes, Drives, and Shafts	27
3.	Aircraft Propulsion System Battery	27
4.	Power Limiter (REVISED)	27
5.	Radio System Battery	27
7.4	Payload Requirements.....	28
1.	Enclosed Payload Bay Interior Dimensions.....	28

2.	Payload bay requirements.....	28
3.	Payload and payload support requirements	29
7.5	Regular Class Scoring.....	29
1.	Flight Score.....	29
2.	Payload Prediction Bonus.....	29
3.	Total Penalty Points.....	29
8	Advanced Class Design Requirements.....	30
8.1	Video documentation of proven operational ability for Advanced class.....	30
8.2	Aircraft Dimension Requirement.....	30
8.3	Engine Requirements	30
8.4	Radio System Battery.....	30
8.5	Rubber Bands.....	30
8.6	Payload Requirements.....	31
8.7	Releasable Payload Requirements	31
8.8	Static Payload Requirements.....	32
8.9	Gyroscopic and other stability augmentation	32
8.10	Autonomous flight.....	32
8.11	Data Acquisition System (DAS)	32
8.12	First Person View System (FPV)	32
8.13	DAS and FPV Failures.....	33
8.14	Payload Specialist.....	33
8.15	Link Budget Format for SAE Aero Design Competition.....	33
8.16	Flight & Drop Procedures	34
8.17	Advance Class Scoring	35
1.	Zone Multiplier	35
2.	Scoring Equation.....	35
9	Micro Class Design Requirements	36
9.1	Aircraft Systems Requirements	36
9.2	Payload Requirements.....	36-37
9.3	Micro Class Aircraft Launch	37-38
9.4	Micro Class Aircraft Hand-Launch Safety Requirements	38
9.5	Aircraft System Container	38
9.6	Timed Aircraft Assembly.....	39
9.7	Mission Requirements.....	40-41

9.8	Micro Class Flight Scoring.....	42
10	Future Rule Change.....	43
	APPENDIX A.....	44
	STATEMENT OF COMPLIANCE.....	44
	Appendix B.....	45
	Appendix C.....	46
	Appendix D.....	47-48
	Appendix E.....	49
	Appendix F.....	50-51

1 COMPETITION REQUIREMENTS

1.1 INTRODUCTION

Official Announcements and Competition Information

The SAE Aero Design competition is intended to provide undergraduate and graduate engineering students with a real-world design challenges. These rules are developed and designed by industry professionals with the focus on educational value and hands-on experience through exposure to today's technical and technology advancement. These rules were design to compress a typical aircraft development program into one calendar year, taking participants through the system engineering process of breaking down requirements. It will expose participants with the nuances of conceptual design, manufacturing, System Integration/Test, and Sell-off through demonstration.

SAE Aero Design features three classes of competition—Regular, Advanced, and Micro.

- **The Regular Class** is an all-electric class with the purpose to develop the fundamental understand of flight.
- **The Advanced Class** continues to use internal combustion engine. It exposes students to system integration with the focus on data acquisition and aircraft performance of complex and multi-faceted mission.
- **The Micro Class** is an all-electric class designed to help students engage in trades between two potentially conflicting requirements, carrying the highest payload fraction possible, while simultaneously pursuing the lowest empty weight possible.

Other SAE Aero Design Competitions: SAE Aero Design Brazil; SAE BRASIL

<http://www.saebrasil.org.br>

1.2 SAE AERO DESIGN RULES AND ORGANIZER AUTHORITY

1. General Authority

SAE International and the competition organizing bodies reserve the rights to revise the schedule of any competition and/or interpret or modify the competition rules at any time and in any manner that is, in their sole judgment, required for the efficient and safe operation of the event or the SAE Aero Design series as a whole.

2. Penalties

SAE International and the competition organizing bodies reserve rights to modify the points and/or penalties listed in the various event descriptions; to accurately reflect the operations execution of the events, or any special conditions unique to the site.

3. Rules Authority

The SAE Aero Design Rules are the responsibility of the SAE Aero Design Rules Committee and are issued under the authority of the SAE International University Programs Committee. Official announcements from the SAE Aero Design Rules Committee, SAE International or the other SAE International Organizers shall be considered part of and have the same validity as these rules. Ambiguities or questions

concerning the meaning or intent of these rules will be resolved by the officials, SAE International Rules Committee or SAE International Staff.

4. Rules Validity

The SAE Aero Design Rules posted on the SAE International Website (www.sae.org) and dated for the calendar year of the competition are the rules in effect for the competition. Rule sets dated for other years are invalid.

5. Rules Compliance

By entering an SAE Aero Design competition, the team members, faculty advisors and other personnel of the entering university agree to comply with, and be bound by, the rules and all rules interpretations or procedures issued or announced by SAE International, the SAE Aero Design Rules Committee and other organizing bodies. All team members, faculty advisors and other university representatives are required to cooperate with, and follow all instructions from competition organizers, officials and judges.

6. Understanding the Rules

Teams are responsible for reading and understanding the rules in its entirety effect for the competition in which they are participating. The section and paragraph headings in these rules are provided to facilitate reading: they do not affect the paragraph contents.

7. Loopholes

It is virtually impossible for a set of rules to be so comprehensive that it covers all possible questions about the aircraft's design parameters or the conduct of the competition. Please keep in mind that safety remains paramount during any SAE International competition, so any perceived loopholes should be resolved in the direction of increased safety/ concept of the competition.

8. Participating in the Competition

Teams, team members as individuals, faculty advisors and other representatives of a registered university who are present on-site at a competition are considered to be "participating in the competition" from the time they arrive at the event site until they depart the site at the conclusion of the competition or earlier by withdrawing.

9. Visa--United States Visas

Teams requiring visas to enter to the United States are advised to apply at least sixty (60) days prior to the competition. Although most visa applications seem to go through without an unreasonable delay, occasionally teams have had difficulties and in several instances visas were not issued before the competition.

Affiliated CDS Student Team Members will have the ability to print out a Registration Confirmation Letter for the individual event(s) that they are attending. Once a student team member affiliates themselves to their teams profile page under their individual edit section. They will have the opportunity to print out their personalized letter with the following information: Student's Name, School's Name, the CDS Event Name, Official Dates and Location(s).

10. Letters of Invitation
Neither SAE International staff nor any competition organizers are permitted to give advice on visas, customs regulations or vehicle shipping regulations concerning the United States or any other country.
11. Certificates of Participation
Competitors have the opportunity to print a personalized Certificate of Participation after they have affiliated from their Team Profile on www.sae.org.
12. Violations of Intent
The violations of the intent of a rule will be considered a violation of the rule itself. Questions about the intent or meaning of a rule may be addressed to the SAE International Officials, Competition Organizers or SAE International Staff.
13. Right to Impound
SAE International and the other competition organizing bodies reserve the right to impound any on-site vehicle/aircraft at any time during a competition for inspection and examination by the organizers, officials and technical inspectors.

1.3 SOCIETY MEMBERSHIP AND ELIGIBILITY

1. Society Membership
Individual team members must be members of one of the following societies: (1) SAE International or an SAE International affiliate society, (2) ATA, or (3) IMechE or (4) VDI. Proof of membership, such as a membership card, is required at the event. Students who are members of one of the societies listed above are not required to join any of the other societies in order to participate in any SAE competition. Students may join online at <http://www.sae.org/students>
Teams are also required to read the articles posted on the SAE Aero Design News Feed (<http://students.sae.org/cds/aerodesign/news>) published by SAE International and the other organizing bodies. Teams must also be familiar with all official announcements concerning the competitions and rule interpretations released by the SAE Aero Design Rules Committee.
2. Team Pilots
Team pilots are not required to be students or SAE International members, but they must be current members of either the Academy of Model Aeronautics or the national model aircraft club in their country of origin (such as the MAAC for Canadian teams). Valid AMA membership cards must be presented at the flying field prior to flying any team's aircraft. Copies of AMA application forms will not suffice as proof of AMA membership; the actual AMA card must be presented at the event flying field.

1.4 LIABILITY WAIVER AND INSURANCE REQUIREMENTS

All on-site participants and faculty advisors are required to sign a liability waiver upon registration. Individual medical and accident insurance coverage is the sole responsibility of the participant.

1.5 RINGERS PROHIBITED

In order to maintain the integrity of a fair competition, the faculty advisor must prohibit

ringers. A ringer is someone that has exceptional skills related to the competition (e.g., a professional model builder) that cannot be a legal member of the team but helps the team win points.

1.6 DESIGN AND FABRICATION

The aircraft must be designed and built by the SAE International student members without direct involvement from professional engineers, radio control model experts, pilots, machinists, or related professionals. The students may use any literature or knowledge related to R/C aircraft design and construction and information from professionals or from professors as long as the information is given as discussion of alternatives with their pros and cons and is acknowledged in the references in the design report. Professionals may not make design decisions, nor contribute to the drawings, the report, or the construction of the aircraft. The faculty advisor must sign the Statement of Compliance given in Appendix.

1.7 ORIGINAL DESIGN

Any aircraft presented for competition must be an original design whose configuration is conceived by the student team members. Photographic scaling of an existing model aircraft design is not allowed. Use of major components such as wings, fuselage, or empennage of existing model aircraft kits is prohibited. Use of standard model aircraft hardware such as engine mounts, control horns, and landing gear is allowed.

1.8 OFFICIAL LANGUAGES

The official language of the SAE Aero Design series is English. Document submissions, presentations and discussions in English are acceptable at all competitions in the series.

Team members, judges and officials at Non U.S. competition events may use their respective national languages for document submissions, presentations and discussions if all the parties involved agree to the use of that language.

SAE Aero Design East	English
SAE Aero Design West	English
SAE Aero Design Brazil	Portuguese and English

1.9 UNIQUE DESIGNS

Universities may enter more than one team in each SAE Aero Design competition, but each entry must be a unique design, significantly different from each other. If the aircraft are not significantly different in the opinion of the rules committee and organizer, then the university will be considered to have only a single entry and only one of the teams and its aircraft will be allowed to participate in the competition. For example, two aircraft with identical wings and fuselages but different empennage would likely not be considered significantly different. For guidance regarding this topic, please email CollegiateCompetitions@sae.org

1.10 AIRCRAFT CLASSIFICATION/DUPLICATE AIRCRAFT

1. One Aircraft per class per competition
A university or college can only have one aircraft registered for one class per competition. A university cannot register more than one team per class per competition.
2. Backup Aircraft
When a team has an identical aircraft as a back-up, the back-up aircraft must go through inspection with the primary aircraft.
3. Scoring with Backup Aircraft
Team will forfeit all flight points earned with the original aircraft if the team decides to fly with an entirely new aircraft.
 1. If a team decides to replace more than 50% of the original aircraft with spare parts, the team will forfeit all flight points earned with the original aircraft
 2. If a team decides to replace less than 50% of the original aircraft with spare parts, the team will retain all flight points earned with the original aircraft

Once the spare parts have successfully flown with original parts of the aircraft, the spare part will no longer be classified as spare.

1.11 AIRCRAFT ELIGIBILITY

Aircraft will only be allowed to compete during a single academic year. Aircraft may be entered in both SAE Aero Design East and SAE Aero Design West during the same calendar year, but that same aircraft may not be used in either competition during the following year. Entering the same aircraft in SAE Aero Design West one year and SAE Aero Design East the next year is not allowed.

1.12 REGISTRATION INFORMATION, DEADLINES AND WAITLIST

Teams intending to participate in the 2016 SAE Aero Design competitions must register their teams online per the open registration schedule (see table

Table 1-1 Open Registration Schedule)

Table 1-1 Open Registration Schedule

<i>Event</i>	<i>Team Limit</i>	<i>Start (Open)</i>	<i>End (Closed)</i>
<i>SAE Aero Design East</i>	<i>75 Teams</i>	<i>October 5th, 2015 10:00 am EST</i>	<i>December 1st, 2015 11:59 pm EST</i>
<i>SAE Aero Design West</i>	<i>75 Teams</i>	<i>October 5th, 2015 10:00 am EST</i>	<i>December 1st, 2015 11:59 pm EST</i>

The registration fee is non-refundable and failure to meet these deadlines will be considered a failure to qualify for the competition. Separate entry fees are required for the East and West events.

1. Team/Class/University Policy

A university or college can only have one aircraft registered for one class. A university cannot register more than one team per class. The registration fees indicated in the Appendix (\$800 USD) must be paid within 72 business hours of registration.

2. Individual Registration Requirements – ACTION REQUIRED

All participating team members and faculty advisors must be sure that they are individually affiliated to their respective school / university on the SAE International website (www.sae.org) event registration page.

If you are not an SAE International member, go to www.sae.org and select the “Membership” link. Students will need to select the “Student Membership” link and then follow the series of questions that are asked. Please note all student participants must be SAE International members to participate in the events.

Faculty members who wish to become SAE International members should choose the “Professional Membership” link. Please note: this is not mandatory for faculty advisors. All student participants and faculty advisors must affiliate themselves to the appropriate team(s) online. To affiliate, refer to the Online Registration Guide.

The “Add New Member” button will allow individuals to access this page and include the necessary credentials. If the individual is already affiliated to the team, simply select the Edit button next to the name. Please be sure this is done separately for each of the events your team has entered. All students, both domestic and international, must affiliate themselves online prior to the competition.

****NOTE: When your team is registering for a competition, only the student or faculty advisor completing the registration needs to be linked to the school. All other students and faculty can affiliate themselves after registration has been completed.**

1.13 WAITLIST

Once an event reaches the 75 team capacity, remaining teams can be placed on a waitlist. The waitlist is capped at 40 available spaces per event and will close on the same day as registration. Once another team withdraws from an event, an SAE International Staff member will inform your team by email (the individual who registered the team to the waitlist) that a spot on the registered teams list has opened. You will have 24 hours to accept or reject the position and an additional 24 hours to have the registration payment completed or process for payment begun. Waitlisted teams are required to submit all documents by the deadlines in order to be considered serious participants and any team that does not submit all documents will be passed over.

1.14 NEW POLICY DEADLINE

1. Failure to meet deadlines

Teams registering for SAE Aero Design competitions are required to submit a number of documents prior to the competition including a Design Report and Payload Predication Graph that the event judges need to evaluate the team during the competition. When these documents are not submitted our judges cannot properly assess the team. Additionally, teams that do not submit a Design Report typically do not come to the competition. Teams that do not notify us that they are withdrawing create the following problems

1. They are included in the static event schedules and judging time is wasted.
2. Their unused registration slot cannot be offered to a team on the waitlist.
Additionally, failure to submit the required Design Report is a clear violation of the rules (Need ruling where you cannot fly unless competed design submission)

2. Late Submission Penalty

Late submission or failure to submit the Design Report will be penalized five (5) points per day. If your Design Report is received more than ten (10) days late it will be classified as “Not Submitted” and your team will not participate and the automatic withdrawn policy will be in effect (see section 3).

3. Automatic withdrawal Policy

Failure to submit the required Design Report and Payload Prediction Graph within 10 days of the deadline will constitute an automatic withdrawal of your team. Your team will be notified after the 9th day of no submission that we have not received your documents and after the 10 days your team’s registration will be cancelled and no refund will be given.

1.15 FACULTY ADVISOR

Each team is expected to have a Faculty Advisor appointed by the university. The Faculty Advisor is expected to accompany the team to the competition and will be considered by competition officials to be the official university representative. Faculty Advisors may advise their teams on general engineering and engineering project management theory, but may not design any part of the vehicle nor directly participate in the development of any documentation or presentation. Additionally Faculty Advisors may neither fabricate nor assemble any components nor assist in the preparation, maintenance, or testing of the vehicle. In Brief - Faculty Advisors may not design, build or repair any part of the aircraft.

1.16 QUESTIONS, COMPLAINTS AND APPEALS

1. Questions

Rules questions must be submitted through www.saeerodesign.com. The Rules Committee will answer questions that are not already answered in the rules or FAQs or that require new or novel rule interpretations. The Committee will not respond to questions that are already answered in the rules. For example, if a rule specifies a minimum dimension for a part the Committee will not answer questions asking if a smaller dimension can be used.

General information about hotels and other attractions in the area as well as a schedule of events will be posted on the SAE International website according to the competition in which you are competing: <http://students.sae.org/competitions/aerodesign/>.

Questions pertaining to the operation specific competitions should be emailed to CDS directly at collegiaticompetitions@sae.org.

2. Complaints

Competition officials will be available to listen to complaints regarding errors in scoring, interpretation, or application of the rules during the competition. Competition officials will not be available to listen to complaints regarding the nature, validity, or efficacy of the rules themselves at the competition. In other words, the Organizer will not change the rulebook at the field.

3. Appeal / Preliminary Review

A team can only appeal issues related to own-team scoring, judging, venue policies, and/or any official actions. Team Captain(s) and/or faculty advisor must bring the issue to the Organizer's or SAE International staff's attention for an informal preliminary review before filing an official appeal.

A team cannot file an appeal to cause harm to another team's standing and/or score.

4. Cause for Appeal

A team may appeal any rule interpretation, own-team scoring or official actions) which the team feel has caused some actual, non-trivial, harm to own-team, or has had a substantive effect on their score.

Teams may not appeal rule interpretations or actions that have not caused them any substantive damage.

5. Appeal Format

If a faculty advisor or team captain(s) feel that their issue regarding an official action or rules interpretation was not properly addressed by the **event officials**, the team may file a formal appeal to the action or rules interpretation with the Appeals Committee.

All appeals must be filed in writing to the Organizer by the faculty advisor or team captain only.

All appeals will require the team to post twenty five (25) points as collateral. If the appeal is successful and the action is reversed, the team ***will not*** forfeit the twenty five (25) collateral points. If the appeal is overruled, the team will forfeit the twenty five (25) collateral points

All rulings issued by the Appeals Committee are final.

6. Appeals Period

All appeals must be submitted within thirty (30) minutes of the end of the flight round or other competition event to which the appeal relates.

7. Appeals Committee

When a timely appeal is received, the committee will review in detail the claims. All contentions or issues raised in the formal appeal will be addressed in a timely manner. The consideration in each review is whether the actions in disputed were just and in-line with the intent of the rules. Once the review is completed, a new order will be issued affirming, reversing or modifying the original determination.

All rulings issued by the Appeals Committee are final.

The Appeals Committee must consist of a minimum of three members: the Organizer or delegate, SAE International representative, and either the Chief Steward, the Chief Judge, the Air Boss and/or rule committee member.

1.17 PROFESSIONAL CONDUCT

1. Unsportsmanlike Conduct

In the event of unsportsmanlike conduct by team members or that team's faculty advisor, the team will receive a warning from a Competition Official. A second violation will result in expulsion of the team from the competition and loss of any points earned in all aspects of the competition.

2. Arguments with Officials

Arguments with or disobedience toward any competition official may result in the team being eliminated from the competition. All members of the team may be immediately escorted from the grounds.

3. Alcohol and Illegal Material
Alcoholic beverages, illegal drugs, firearms, weapons, or illegal material of any type are not permitted on the event sites at any time during the competition. Any violations of this rule will result in the immediate expulsion of all members of the offending school, not just the individual team member in violation. This rule applies to team members and faculty advisors. Any use of illegal drugs or any use of alcohol by an underage person must be reported to the local law enforcement authorities for prosecution.
4. Organizer's Authority
The Organizer reserves the exclusive right to revise the schedule of the competition and/or to interpret the competition rules at any time and in any manner which is required for efficient operation or safety of the competition.
5. Ground Safety and Flight Line Safety Equipment
 1. **No open toe shoes allowed.** All team participants, including faculty advisors and pilots, will be required to wear CLOSED toe shoes during flight testing and during flight competition.
 2. **Smoking is prohibited.** Smoking is prohibited in all competition areas.
 3. All students in all classes involved at the flight line must wear safety glasses.
 4. Micro Class must wear hard hats in addition to safety glasses at the flight line.

1.18 SAE TECHNICAL STANDARDS ACCESS

A cooperative program of SAE International's Education Board and Technical Standards Board is making some of SAE International's Technical Standards available to teams registered for any North American CDS competition at no cost. The Technical Standards referenced in the Collegiate Design Series rules, along with other standards with reference value, will be accessible online to registered teams, team members and faculty advisors. To access the standards (1) your team must be registered for a competition in North America and (2) the individual team member or faculty advisor wanting access must be linked to the team in SAE International's system.

Access Procedure - Once your team has registered, there will be a link to the SAE Digital Library to access the technical standards under "Design Standards" on your profile page where all the required onsite team information is added. On the SAE Digital Library, you will have the ability to search standards either by J-number assigned or topic of interest such as brake light.

A list of accessible SAE International Technical Standards can be found in Appendix S.

2 GENERAL AIRCRAFT REQUIREMENTS

2.1 AIRCRAFT IDENTIFICATION

Team number as assigned by SAE International must be visible on both the top and bottom of the wing, and on both sides of the vertical stabilizer or other vertical surface.

1. Aircraft must be identified with the school name and address either on the outside or the inside of the aircraft.
2. 3-inch minimum size numbers must be used for all aircraft classes
3. The University name must be clearly displayed on the wings or fuselage.
4. The University initials may be substituted in lieu of the University name provided the initials are unique and recognizable.

The assigned aircraft numbers appear next to the school name on the “Registered Teams” page of the SAE Aero Design section of the Collegiate Design Series website at:

SAE Aero East: <http://students.sae.org/cds/aerodesign/east/>

SAE Aero West: <http://students.sae.org/cds/aerodesign/west/>

2.2 NO LIGHTER-THAN-AIR OR ROTARY WING AIRCRAFT

Competing designs are limited to fixed wing aircraft only. No lighter-than-air or rotary wing aircraft such as helicopters or auto-gyros will be allowed to compete.

2.3 EMPTY CG DESIGN REQUIREMENT AND EMPTY CG MARKINGS ON AIRCRAFT

All aircraft must have the following Center of Gravity (CG) related requirements:

1. All aircraft must be flyable at their designated Empty CG position (no payload, ready to fly) within the fore and aft CG range as documented on the submitted 2D aircraft drawing.
2. All aircraft must have the fuselage clearly marked on both sides with a classic CG symbol (Figure 2.1) that is a minimum of .5” in diameter centered at the Empty CG position, per the submitted 2D drawings. (Wing type aircraft may place the two CG markings on the bottom of the wing.)
3. The Empty CG location will be verified during Technical and Safety Inspection
4. No empty weight flight is required.



Figure 2.1 - Center Of Gravity Symbol

2.4 GROSS WEIGHT LIMIT

Aircraft gross take-off weight may not exceed fifty-five (55) pounds

2.5 CONTROLLABILITY

All aircraft must be controllable in flight.

2.6 RADIO CONTROL SYSTEM

The use of a 2.4 GHz radio control system is required for all aircraft. The 2.4 GHz radio control system must have a functional fail safe system that will reduce the throttle to zero if the radio signal is lost.

2.7 SPINNERS OR SAFETY NUTS REQUIRED

All aircraft must utilize either a spinner or a rounded model aircraft type safety nut.

2.8 METAL PROPELLERS

Metal propellers are not allowed.

2.9 LEAD IS PROHIBITED

The use of lead in any portion of any aircraft (payload included) is strictly prohibited.

2.10 PAYLOAD DISTRIBUTION

The payload cannot contribute to the structural integrity of the airframe

2.11 AIRCRAFT BALLAST

Aircraft ballast is allowed to be used as desired with the following exceptions:

1. Ballast can never be used in the closed payload bay.
2. Ballast stations must be indicated on the 2D drawings.
3. Ballast must be secured so as to avoid shifting or falling off the aircraft and causing a CG problem.
4. Ballast will never be counted as payload.

2.12 STORED ENERGY RESTRICTION

Aircraft must be powered by the engine(s)/motor on board the aircraft. No other internal and/or external forms of stored potential energy allowed.

2.13 CONTROL SURFACE SLOP

Aircraft control surfaces and linkage must not feature excessive slop. Sloppy control surfaces lead to reduced controllability in mild cases, or control surface flutter in severe cases.

2.14 SERVO SIZING

Analysis and/or testing must be described in the Design Report that demonstrates the servos are adequately sized to handle the expected aerodynamic loads during flight.

2.15 CLEVIS KEEPERS

All control clevises must have additional mechanical keepers to prevent accidental opening of the control clevis in flight.

2.16 RED ARMING PLUG

All electric powered aircraft MUST use a discrete and removable red arming plug to arm and disarm the aircraft propulsion system. This red arming plug must be integrated into the electrical circuit between the battery and the electronic speed controller (ESC).

1. The red arming plug must physically be located at 40% to 60% of the aircraft length from the aircraft propeller. This is to allow arming and disarming the aircraft at a safe distance from the propeller.
2. The red arming plug must be located on top of the fuselage or wing and external of the aircraft surface.
3. Disconnecting wiring harnesses to arm and disarm a system will NOT be allowed.

2.17 REPAIRS, ALTERATIONS, AND SPARES

1. The original design of the aircraft as presented in the written and oral reports must be maintained as the baseline aircraft during the course of the competition.
2. In the event of damage to the aircraft, the aircraft may be repaired provided such repairs do not drastically deviate from the original baseline design. All major repairs must be inspected before the aircraft is cleared for flight.

2.18 ALTERATION AFTER FIRST FLIGHT

Minor alterations are allowed after the first and subsequent flight attempts.

1. Penalty will ONLY be assessed if 2/3 of the ruling committee (Event Director, Head scoring judge and/or SAE staff judge) agree that there were significant modifications made from the baseline configuration.
2. If the ruling committee determines that the changes are a result of safety-of-flight, the changes will not incur penalty points. Alteration must be reported as an Engineering Change Request (ECR) Appendix C

2.19 COMPETITION SUPPLIED FUEL

Classes that use internal combustion engine may use the competition-supplied fuel.

1. Advanced Class teams may provide their own fuel
2. Fuel used for the Advanced Class must be acceptable for use by the AMA and the competition organizer.
3. No fuel systems with gaseous boosts in which gases other than air enter the internal combustion engine will be allowed; pressurized air is also not allowed.
4. Engines utilizing extremely hazardous fuels such as those containing tetranitromethane or hydrazine are prohibited.

3 MISSION REQUIREMENTS

3.1 ROUND ATTEMPT

Teams are allowed one (1) flight attempt per round.

1. Regular and Advanced class: Without violating other take-off restrictions, a team can have multiple attempts to become airborne within the team's prescribed time limit for each respective class identified in section 3.5
2. Micro class: only one hand launch attempt is allowed per round.

3.2 ENGINE OR MOTOR RUN-UP BEFORE TAKEOFF

Aircraft may be throttled up/run up for takeoff, subject to the following conditions:

1. Advanced class: Use of a helper to hold the aircraft for takeoff is allowed. Helper may not push the aircraft on release.
2. Regular class: Use of a helper to hold the aircraft is allowed. Main wheels must be placed on the takeoff line for Regular class. The helper may not push the aircraft upon release.)
3. Micro class: aircraft must be run up and hand launched within the launch circle for Micro class.

3.3 AIRCRAFT CONFIGURATION AT LIFTOFF AND DURING THE FLIGHT ATTEMPT

The aircraft must remain intact during takeoff, the circuit of the field and landing.

1. No parts of any kind may leave the aircraft during the flight attempt.
2. Exception: a broken prop during landing is allowed and does not invalidate the flight attempt.

3.4 COMPETITION CIRCUIT REQUIREMENTS

1. During departure and approach to landing, the pilot must not fly the aircraft in a pattern that will allow the aircraft to enter any of the no-fly zones
2. No aerobatic maneuvers will be allowed at any time during the flight competition in any competition class. This includes but not limited to: loops, figure 8's, Immelmann, all types of rolling maneuvers and inverted flight.
3. Regular and Micro Class aircraft must successfully complete a minimum of one 360° circuit.
4. Advanced class has no specific flight pattern (See Advanced class rules for details concerning the releasable payload drop mission element.)

3.5 TIME LIMITS AND MULTIPLE FLIGHT ATTEMPTS

1. Multiple takeoff attempts are allowed within the three-minute window as long as the aircraft has **NOT** become airborne during an aborted attempt.
2. If an airborne aircraft returns to the ground after airborne and beyond the take-off limits, the flight attempt will be disqualified for that round.

Table 3.1

Class	Time Limit (sec)	Can make multiple takeoff attempts if:			Definition of Takeoff is defined as the point at which:
		Still within the Time Limit	Bounce within required take-off distance	Bounce outside the required take-off distance	
Regular	180	Yes	Yes	No	the main wheels leave the ground
Advanced	180	Yes	Yes	No	the main wheels leave the ground
Micro	90	No	No	No	The launcher is no longer in contact with the aircraft

3.6 TAKE-OFF

Takeoff direction will be determined by the Air Boss, and will selected to face into the wind if possible.

1. Regular and Advanced class aircraft must remain on the runway during the takeoff roll.
2. Micro class must be launched from the designated launch circle.
3. Distance requirements are defined in Table 3.2
4. Making the initial turn before passing the “distance from start before initial turn” requirement will disqualify that flight attempt. (Table 3.2)

Table 3.2

Class	Take-Off Distance Limits (ft.)	Distance from start before initial turn (ft.)	Description
Regular	200 ft.	400 ft.	Aircraft must be airborne within the prescribed take-off distance.
Advanced	None	None	Aircraft will have the full use of the runway
Micro	N/A	100 ft.	Team may use the entire launch circle per attempt to get the aircraft airborne. Only one (1) launch attempt per round is allowed

3.7 LANDING

A successful landing is defined as a controlled return to the ground inside the landing zone for that class and remaining on the ground through rollout. A failed landing attempt will result in no score for the round.

3.8 LANDING ZONE

The landing zone is a predetermined fixed area for each class for the purpose of returning a flying aircraft back to the ground. See Table 3.3 for class requirements.

1. The landing zones will be visibly marked at each event site prior to the start of the competition.
2. It is the team and team pilot's responsibility to be aware of the class specific landing zone dimensions at the event site.
 1. Allowed during Landing
 1. Controlled rollout beyond the landing zone is allowed provided the aircraft touches the ground inside the landing zone.
 2. Controlled run-off to the side of the runway within the landing zone is allowed provided the aircraft touches the ground inside the landing zone.
 3. Controlled run-off to the side of the runway beyond the landing zone is allowed provided the aircraft touches the ground inside the landing zone.
 2. Not Allowed during Landing
 1. Touchdown outside the landing zone for that class.
 2. Uncontrolled runoff or bouncing across the boundary at the end of the landing zone is not allowed and will be judged as a failed landing attempt.
 3. Touch-and-goes are not allowed and will be judged as a failed landing attempt.
 4. Uncontrolled runoff or a bouncing run-off to the side of the runway is not allowed and will be judged as a failed landing attempt.

Table 3.3: Landing Distance Limit

Class	Landing Distance Limits (ft.)	Description
Regular	400 ft.	Aircraft must land in the same direction as takeoff within a designated landing zone
Advanced	None	Aircraft must land in the same direction as takeoff within a designated landing zone
Micro	200 ft.	Aircraft must land in the same direction as takeoff within a designated landing zone

3.9 GROUNDING AN AIRCRAFT

1. An aircraft will be grounded if it is deemed non-flight-worthy or not in compliance with class rules by any SAE official, event official or a designated technical/safety inspector.

2. Until the non-flight-worthy or out of compliance condition has been addressed and has been cleared by re-inspection, the aircraft will not be allowed to fly in the competition.

3.10 NO-FLY ZONE

Each competition will have venue-specific **no-fly zones**. The no-fly zones will be defined during the all hands briefing at the event and during the pilot's briefings.

1. At no time will an aircraft enter the no-fly zones, whether under controlled flight or uncontrolled.
2. First infraction for crossing into the no-fly zone will result in an invalidated flight attempt and zero points will be awarded for that flight.
3. Second infraction will result in disqualification from the entire event and loss of all points.
4. It is the team and team pilot's responsibility to be aware of the venue-specific no-fly zones and to comply with all venue specific rules.
5. If a team is unable to directionally control their aircraft and it is headed towards or is in a no fly zone, the Judges and/or Flight boss may order the pilot to intentionally crash the aircraft to prevent it from endangering people or property. This safety directive must be followed immediately if so ordered by the officials.

3.11 FLIGHT RULES ANNOUNCEMENT

Flight rules will be explained to all teams before the flight competition begins, either during the pilots' meeting or during activities surrounding the technical inspections and oral presentations.

3.12 FLIGHT RULES VIOLATIONS

1. Violation of any flight rule may result in the team being eliminated from the competition.
2. All members of an eliminated team may be escorted from the grounds.

3.13 LOCAL FIELD RULES

In addition to competition rules, the local flying club may have additional rules in place at the event flying field.

1. Club rules will be obeyed during the flight competition.
2. In the event that club rules conflict with competition rules, it is the responsibility of the team captain and/or faculty advisor to bring attention to the conflict and follow the appeals process to resolve the conflict.

4 DESIGN REPORT

The Design Report is the primary means in which a team conveys the story of how their aircraft is the most suited design to accomplish the intended mission. The Design Report should explain the team's thought processes and engineering philosophy that drove them to their conclusions.

Some topics that are important to cover are: selection of the overall vehicle configuration, wing plan form design including airfoil selection, drag analysis including three-dimensional drag effects, aircraft stability and control, power plant performance including both static and dynamic thrust, and performance prediction. Other topics as appropriate may be included. For more information regarding performance prediction, a white paper by Leland Nicolai is available on the SAE Aero Design website.

4.1 SUBMISSION DEADLINES

The Technical Design Report, 2D drawing, and supplemental Tech Data Sheet (TDS) must be electronically submitted to www.saeaerodesign.com no later than the date indicated on the Action Deadlines given in the Appendix. Neither the Organizer nor the SAE International is responsible for any lost or misdirected reports, drawings, or server routing delays. The SAE International will not receive any paper copies of the reports through regular mail or email.

4.2 DESIGN REPORT REQUIREMENTS

The deliverable content of the Technical Design Report is specified in Table 4.1

1. The Technical Design Report shall not exceed thirty (30) pages. If the design report exceeds thirty (30) pages, the judges will only score the first thirty (30) pages.
2. The Technical Design Report shall be typewritten and double-spaced.
3. The report font shall be 12 pt. proportional; or 10 char/in. non-proportional font.
4. The report margins shall be: 1" Left, 0.5" right, 0.5" top, and 0.5" bottom.
5. All report pages will be ANSI A (8 1/2 x 11 inches) page format.

Table 4.1

	Page Count	Regular Class	Advanced Class	Micro Class
Design Report (Cover page, Table of Content, Statement of Compliance and Appendices)	28	40 pts	40 pts	40 pts
2D Drawings	1	5 pts	5 pts	5 pts
TDS: Payload Prediction	1	5 pts	-	-
TDS : Radio Link Budget (Appendix B)	1	-	5 pts	-
TDS: Aircraft Weight Build-up Schedule	1	-	-	5 pts
Total	30	50 pts	50 pts	50 pts

4.3 2D DRAWINGS

1. 2D Format and Size

The 2D drawing must be ANSI B sized page (PDF) format (11 x 17 inches).

1. For teams outside North America that cannot submit an ANSI B size drawings, page format size must be the closest size available to ANSI B.
2. Drawing shall consist of one (1) page
3. Markings Required

The 2D drawing must be clearly marked with:

1. Team number
2. Team name
3. School name

2. Views Required

The 2D drawing must include a standard aeronautical three-view of the aircraft arranged as described below:

1. Left side view in the lower left with the nose pointing left.
2. Top view above the left side view also with the nose pointing left.
3. Front view in the lower right.

3. Dimensions Required

At a minimum, all aircraft drawings must have the following dimensions clearly shown:

1. Aircraft length, width and height.
2. Drawing shall have CG locations clearly dimensioned in reference to the aircraft datum.
3. All drawing dimensions must be in inches and decimal inches, to an appropriate level of precision.

4. Summary Data Information Required

The 2D drawings must contain a table with a summary of pertinent aircraft data. The minimum data to be shown in the table is:

1. Wingspan
2. Empty weight
3. Motor or engine make and model

5. Weight and Balance Information

The drawing shall contain the required weight and balance information listed below, including a weight and balance data table with a summary of pertinent aircraft equipment and other data as indicated below.

1. All 2D aircraft drawings must have a designated aircraft datum clearly indicated on the 2D drawings.
2. Minimum list of equipment to be shown in the weight and balance table is:
3. Motor or engine, battery (s), fuel if applicable, payload, ballast (if used) and electronics.
4. Each item listed in the table must show its location from the aircraft datum in inches, moment arm and resultant moment of force. See "Rules and Important Documents" section of the SAE Aero Design website for additional information.
5. The following Center of Gravity (CG) information must be clearly shown in the drawing:
 1. Forward CG limit

2. Aft CG limit
3. Empty CG, ready to fly (no payload, no fuel if applicable)
4. Fully loaded CG (maximum expected payload and fuel, if applicable)

4.4 TECH DATA SHEET: PAYLOAD PREDICTION (REGULAR CLASS ONLY)


The Regular Class payload prediction bonus is derived from the payload prediction curve. The curve represents engineering estimate on aircraft's lift performance based on density altitude. Density altitude is calculated from the field's recorded temperature and pressure.

1. Curve Requirements:
 1. Graph shall be linearized over the relevant range
 2. The linear equation shall be in the form of:

$$y = mX + b$$

y = payload weight (lbs)
X = Density Altitude (ft)
m = Slope of the linear line
b = y-intercept.

3. Only one curve, and hence one equation, may be presented on the graph. This curve may take into account predicted headwind for local conditions, rolling drag, inertia, engine and propeller performance, or any other factors that may affect takeoff performance. All these factors are allowed components of the prediction curve, but only one curve will be allowed; multiple curves to account for varying headwind conditions will not be allowed.
4. Teams presenting multiple curves will receive zero (0) bonus points for payload prediction.
5. In scoring the payload prediction, the equation as printed on the prediction graph will be used to calculate the prediction bonus. In the event the line as printed on the graph contradicts the equation, the equation must be used to determine the prediction bonus. Teams omitting the prediction curve equation from the prediction graph will receive zero (0) bonus points for payload prediction.

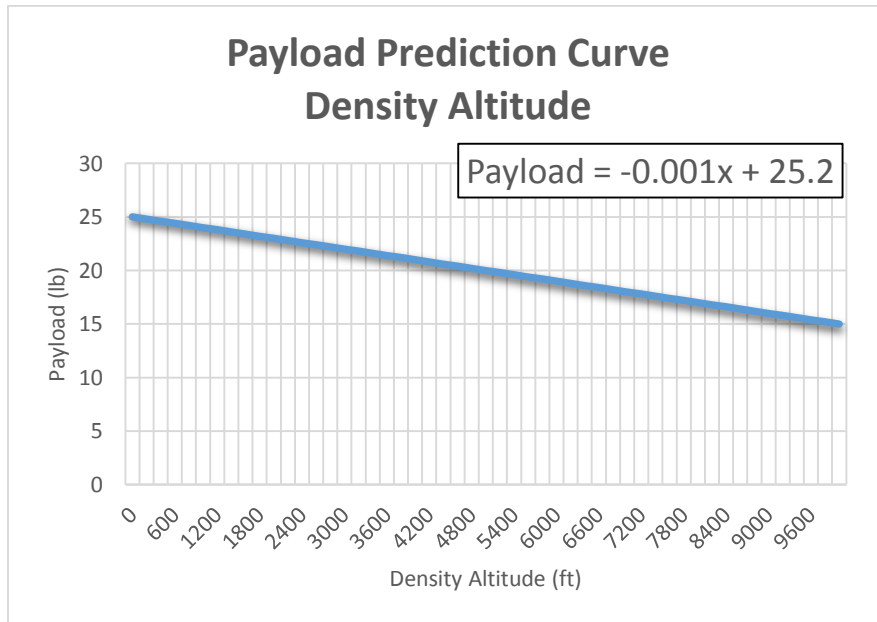

4.5 TECH DATA SHEET: RADIO LINK BUDGET (ADVANCED CLASS ONLY)

A **link budget** is accounting of all of the gains and losses from the transmitter, through the medium (free space, cable, waveguide, fiber, etc.) to the receiver in a telecommunication system. It accounts for the attenuation of the transmitted signal due to propagation, as well as the antenna gains, feed-line and miscellaneous losses. Randomly varying channel gains such as fading are taken into account by adding some margin depending on the anticipated severity of its effects. The amount of margin required can be reduced by the use of mitigating techniques such as antenna diversity or frequency hopping.

A template for the link budget can be found in Appendix B.

4.6 TECH DATA SHEET: WEIGHT BUILDUP (MICRO CLASS ONLY)

The Micro Class Weight & Balance Build-up schedule will help teams understand the important of managing aircraft weight to achieve safety of flight at the desired payload fraction.

1. Each team shall supply a one (1) sheet summary list of pertinent aircraft parts and weight (lb)

5 TECHNICAL PRESENTATION

Like all professionals, engineers must possess a well-developed ability to synthesize issues and communicate effectively to diverse audiences. The technical portion of the aero-design competition is designed to emphasize the value of an ability to deliver clear, concise and effective oral presentations. Teams can obtain a maximum technical presentation score of fifty (50) points. Presentation score shall be comprise of scores from the presenter's delivery technique and the judges' evaluation of technical content, empirical analysis, and quality visual aide.

5.1 TECHNICAL PRESENTATION REQUIREMENTS

1. Technical presentation shall last ten (10) minutes and followed by a five (5) minute "Question and Answer" (Q&A) period.
2. Technical presentation shall be delivered in English.
3. Technical presentation shall address, but are not limit to, trade studies performed, design challenges, and manufacturing techniques.
4. Technical presentation is limited to student team members only. Non-team member pilot, faculty advisors, and/or parents can attend the technical presentation but are prohibited from participating in the setup, delivery, and/or the Q&A.
5. Assistance in the use of visual aids is advisable; Film clips, if used, may not exceed one-minute total duration; Film clips may not be accompanied by recorded narration
6. Regular and Micro Class shall display their entry aircraft during technical presentation. Advanced Class team are exempted from the requirement to have a static display if and only if the size of the aircraft prevents entry into the room.
7. Advanced Class teams shall make every effort to bring all or a portion of their aircraft to the presentation; however, if the size of the aircraft prevents its display, adequate photographs are acceptable substitutes.
8. During the presentation and static display setup, the teams shall provide a single sheet (8.5" x 11") marketing/promotion piece to further detail aircraft's feature, capabilities, and unique design attributes.

5.2 REGULAR CLASS PAYLOAD LOADING AND UNLOADING DEMONSTRATION

Technical Presentation for Regular Class shall demonstrate the requirement to quickly load/secure and unload payloads. This is a timed activity and shall be performed by one (1) member of the team for the following time constraints.

1. One (1) minute to load/secure the payload for flight
2. One (1) minute to unload the payload
3. A minimum of ten (10) pounds must be used during the demonstration.

5.3 TECHNICAL PRESENTATION PROCESS AND PROCEDURES

Each presentation room shall have a lead judge with the responsibility to ensure compliance with competition rules and schedule. Lead judge will identify a timekeeper.

1. With agreement from the speaker, the timekeeper will give the speaker a one (1) minute warning prior to the ten (10) minute limit.
2. If the team exceed the ten (10) minute limit, the team will be assessed a five (5) point penalty for going over the time limit.
3. The presentation shall be stopped at the eleven (11) minute mark.
4. A team shall have five (5) minutes for Q&A immediately following the presentation. Questions may be asked by any judge on the panel
5. Any time remaining or exceeding the ten (10) minutes shall be added to or subtracted from the five (5) minute Q&A.
6. Presentation Time Breakdown

2	Minutes	Setup presentation, visual aide, and/or static display
10	Minutes	Perform Technical Presentation
5	Minutes	Questions & Answers
1	Minute	Loading Demonstration (Regular Class Only)
1	Minute	Unloading Demonstration (Regular Class Only)
3	Minutes	Pack-up presentation and static display

6 TECHNICAL INSPECTION

Technical and Safety inspection of all aircraft will be conducted using the published Technical and Safety Inspection checklists for each class for the current year. The checklists can be found on the SAE Aero Design home page under Rules and Important Documents.

Technical and Safety Inspection is the process of checking all aircraft for:

- 1 Compliance with all General aircraft requirements.
- 2 Compliance with all aircraft configuration requirements for their class.
- 3 Overall safety and airworthiness.

All aircraft must pass the Technical and Safety Inspection in order to compete. It is strongly suggested that each team pre-inspect their aircraft and correct any problems using the official inspection checklist before arriving at the competition.

6.1 AIRCRAFT CONFORMANCE TO 2D DRAWING

During Technical Inspection, the aircraft will be inspected and measured for conformance to the 2D drawing presented in the Design Report.

1. At a minimum, aircraft length, wingspan and height dimensions will be measured and compared to the 2D drawing.
2. All teams must have a hard copy of their design report with them during technical inspection.
3. Aircraft will have their actual empty CG compared to the empty CG presented in the design report 2D drawing.

6.2 DEVIATIONS FROM 2D DRAWING

Any deviation in construction of the aircraft from the submitted 2D drawing since submission of the Design Report must be reported in writing.

1. Each design change must be documented separately using the Modification Change Request (CR).
2. Only one design change may be submitted per CR form.
3. Judges will assess penalty points for design changes using the penalty chart (FORM MOD-P)

6.3 FAILURE TO REPORT DESIGN CHANGES

In the case where a team fails to report a design change before inspection, an additional one (1) point penalty will be assessed for each unreported design change discovered during inspection.

6.4 SAFETY AND AIRWORTHINESS OF AIRCRAFT

Technical and Safety Inspection will be also be used to assess the general safety and airworthiness aspects of each aircraft by seeking any problems that could cause an aircraft to depart controlled flight. This assessment includes but is not limited to:

1. Unintentional wing warps
2. Control surface alignment
3. Correct control surface response to radio transmitter inputs
4. Structural and mechanical soundness

6.5 INSPECTION OF SPARE AIRCRAFT AND SPARE AIRCRAFT COMPONENTS.

1. All spare aircraft and spare aircraft components (wings, fuselages and tail surfaces) must be presented for inspection at the same time as the primary aircraft.
2. Any spare aircraft or spare aircraft components presented for inspection after the team has had their primary aircraft inspected may not be used in the competition.

6.6 AIRCRAFT MUST MEET ALL INSPECTION REQUIREMENTS THROUGHOUT THE COMPETITION.

1. All aircraft must meet all Technical and Safety Inspection requirements throughout the competition.
2. Any official may request that an aircraft be re-inspected if a general, class configuration or safety requirement problem is seen on an aircraft at any time during the event.
3. This includes any errors or omissions made by officials during inspection.

6.7 TECHNICAL AND SAFETY INSPECTION PENALTIES

No points are available to be scored as a result of the Technical and Safety Inspection: teams may only lose points as a result of errors and problems encountered during the inspection process. Any penalties assessed during Technical Inspection will be applied to the overall competition score.

7 REGULAR CLASS DESIGN REQUIREMENTS

Design Objective:

The objective of Regular Class is to design an aircraft that can lift as much weight as possible while observing the power available and aircraft's length, width, and height requirements. Accurately predicting the lifting capacity of the aircraft is an important part of the exercise, as prediction bonus points often determine the difference in placement between competing teams.

7.1 AIRCRAFT DIMENSION REQUIREMENT

Fully configured for takeoff, the free standing aircraft must have a maximum combined length, width, and height (L + W + H) of no more than. **175 inches**. Aircraft exceeding this design requirement will be disqualified from the competition.

- A. Length is defined as the maximum distance from the front to the rear of the aircraft.
- B. Width is the wingspan or the maximum distance from wingtip to wingtip.
- C. Height is defined as the maximum distance perpendicular to the ground to the highest part of the aircraft (propeller not included).

Note: Modifications to the aircraft to meet the Length + Width + Height limitations during technical inspection may be subjected to design change penalties.

7.2 MATERIAL AND EQUIPMENT RESTRICTIONS FOR REGULAR CLASS

1. Fiber-Reinforced Plastic (FRP)
The use of Fiber-Reinforced Plastic (FRP) is prohibited on all parts of the aircraft. Exploration of alternative materials and building methods are greatly encouraged.
2. Fiber-Reinforced Plastic (FRP) (Exceptions)
The only exceptions are the use of a commercially available FRP motor mount, propeller, landing gear and control linkage components.
3. Rubber bands
Rubber bands shall not be used to retain the wing to the fuselage.
4. Stability Assistance
All types of gyroscopic or other stability assistance are prohibited.

7.3 AIRCRAFT SYSTEM REQUIREMENTS

1. Electric Motor Requirements

There are no restrictions (make or model) on the electric motor. Only a single motor configuration is allowed (no multiple motors).

2. Gear boxes, Drives, and Shafts

Gearboxes, belt drive systems, and propeller shaft extensions are allowed as long as a one-to-one propeller to motor RPM is maintained. The prop(s) must rotate at motor RPM.

3. Aircraft Propulsion System Battery

Regular Class aircraft must be powered by a commercially available Lithium-Polymer battery pack.

1. Required: 6 cell (22.2 volt) Lithium Polymer (Li-Poly/Li-Po) battery pack.
Minimum requirements for Li-Po battery: 3000 mAh, 25c
2. Homemade batteries are NOT allowed.

4. Power Limiter (REVISED)

All Regular Class aircraft must use a new 2015 version 1000 watt power limiter from our supplier, Neumotors.com. The limiter is only available at the follow link:

<http://neumotors.cartloom.com/shop/item/24377>. This supplier has agreed to ship worldwide to any team.

5. Radio System Battery

If a separate battery is used for the radio system, the battery pack must have enough capacity to safely drive all the servos in the aircraft, taking into consideration the number of servos and potential current draw from those servos.


1. A battery pack with a minimum capacity of 1000 mAh must be used for the radio system
2. The battery pack must be a LiPo or LiFe type battery.
3. Battery voltage regulators are allowed.

7.4 PAYLOAD REQUIREMENTS

1. Enclosed Payload Bay Interior Dimensions

Table 7.1 - Length Width Height Tolerance

Length	Width	Height	Tolerance
10.00"	4.00"	4.00"	+ 0.125", - 0.000"

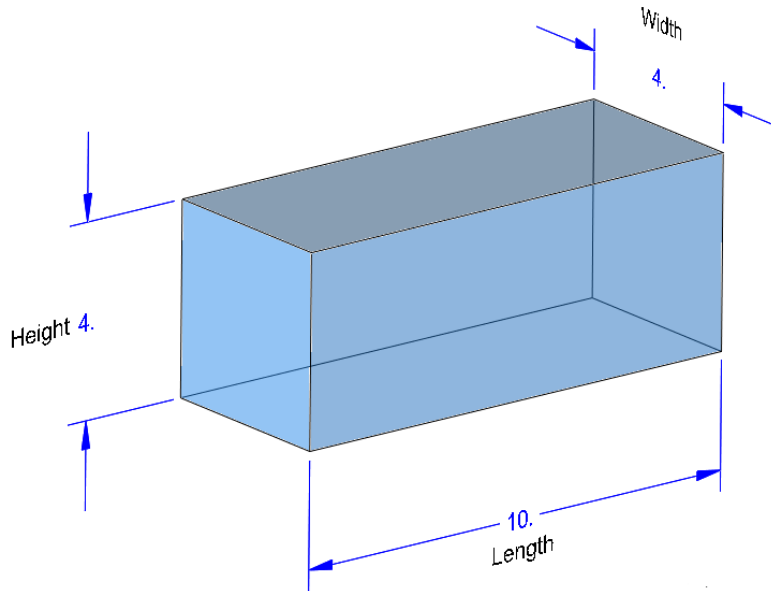

2. Payload bay requirements

Regular Class aircraft must have a single fully enclosed payload bay with precision interior dimensional requirements.

1. A fully enclosed payload bay is defined as having four sides, a bottom and a top.
2. The payload bay must meet the precision dimension requirements above table 7.1.
3. One or more surfaces of the payload bay must be removable for payload access and for inserting the official payload bay test block.
4. The interior surfaces of the payload bay must be smooth and unbroken (no lightening holes or visible gaps between surfaces).
5. No penetrations are allowed through the payload bay surfaces except for the payload support assembly.
6. The payload support assembly MUST be removable so that the official payload bay test block can be inserted into the payload bay during technical inspection.
7. The removable payload support assembly not extending beyond the payload bay will be counted as payload. Excess fastener or hardware length outside the defined payload bay will not be counted as payload
8. The payload bay is never considered as payload.
9. All payload carried for score must be carried within the payload bay.

3. Payload and payload support requirements
The payload must consist of a support assembly and payload plates.
 1. The payload must be secured to the airframe to ensure the payload will not shift or come loose in flight.
 2. There is no required configuration for the payload plates.
 3. Teams must provide their own payload plates.
 4. The support assembly must be constructed so as to mechanically retain the weights as a homogeneous mass. The design of the support assembly will depend upon the configuration of the payload plates.
 5. Tape, Velcro, rubber bands and friction systems alone may not be used to retain the payload plates.
 6. The total payload consists of the payload plates plus the payload support assembly

7.5 REGULAR CLASS SCORING

In order to participate in the flight portion of the competition, each team is required to have submitted AND received a score for their Design Report and Oral Presentation.

The Final Regular Class Flight Score shall comprise of total weights lifted, Max Payload Prediction Bonus and Total Penalty deduction

$$FFS = \text{Final Flight Score} = \sum_{n=1}^n FS_n - \sum T + B_n$$

1. Flight Score

$$FS = \text{Payload carried for each flight (lbs)}$$

2. Payload Prediction Bonus

$$B_n = 20 - (P_p - P_a)^2$$

$$P_p = \text{Payload Prediction}$$

$$P_a = \text{Actual Payload Carried}$$

3. Total Penalty Points

$$T = \text{Penalty Points assessed throughout the event}$$

8 ADVANCED CLASS DESIGN REQUIREMENTS

The objective of the Advanced Class is to design the most efficient aircraft capable of accurately dropping multiple two pound (2 lb.) humanitarian aid packages from a minimum of 100ft off the ground. Though the class is mostly focused on mission success, students will need to perform trade studies to optimize empty weight and anticipate repair build-up weight while meeting several aircraft design requirements.

8.1 VIDEO DOCUMENTATION OF PROVEN OPERATIONAL ABILITY FOR ADVANCED CLASS. (NEW)

All Advanced class teams are required to bring a video documenting the proven operational ability of their advanced class aircraft to Technical and Safety Inspection.

1. The video must show the following three activities accomplished successfully with their competition aircraft: A takeoff, a payload release, and a landing without damage.
2. The video will be reviewed by SAE officials during Technical and Safety Inspection.
3. Advanced class aircraft will not be allowed to compete without the video documentation of proven operational ability.
4. Teams must provide a device to play the video for the officials at a screen size that allows the officials to clearly see the aircraft accomplish each required activity.
5. Videos should be no more than 1 minute in length. Edited video will be accepted if the video is of the same flight.

8.2 AIRCRAFT DIMENSION REQUIREMENT

There are no dimensional limits on an Advanced Class Aircraft.

8.3 ENGINE REQUIREMENTS

Advanced Class aircraft must be solely powered by internal combustion, reciprocating engines. The common-use displacement will be used to determine displacement, i.e. the advertised displacement.

1. The total displacement may not exceed .46 cubic inches.
2. Advanced Class aircraft are not limited to the number of engines.
3. No changes to the internal displacement of the engine(s) will be allowed.
4. No restriction to the make and model of the engine(s).

8.4 RADIO SYSTEM BATTERY

The radio system battery pack must have enough capacity to safely drive all the servos in the aircraft, taking into consideration the number of servos and potential current draw from those servos. If the radio system battery also supplies DAS and FPV power needs, the radio system battery must be large enough for these power requirements as well.

1. A battery pack with a minimum capacity of 1000 mAh must be used for the radio system
2. The battery pack must be a LiPo or LiFe type battery.
3. Battery voltage regulators are allowed.

8.5 RUBBER BANDS

Rubber bands shall not be used to retain the wing to the fuselage.

8.6 PAYLOAD REQUIREMENTS

Advanced Class payload requirements shall consist of two types of payload

1. Releasable Payload.
2. Static payload

8.7 RELEASABLE PAYLOAD REQUIREMENTS

There is no limit to the number of Releasable Payloads that can be carried by each aircraft.

1. Releasable Payloads may be mounted internally and/or externally to the airframe.
2. Releasable Payloads shall be independent of all others carried on the aircraft.
3. Releasable Payloads that are connected (e.g., become tangled during drop) in any way shall not be counted for score.
4. Each Releasable Payload shall be sand enclosed within a sewn fabric material container.
5. Each Releasable Payload shall have a minimum weight of 2.0 lbs. and a maximum weight of 2.25 lbs.
6. Each Releasable Payload will be inspected and weighed during technical inspection and after each successful flight.
7. Excluding the streamer, each Releasable Payload shall be no more than 10 inches in any linear dimension (length, width or height).
8. The CG of each mounted Releasable Payload shall not exceed a distance of 6 inches laterally or longitudinally from the CG of the EW aircraft. This shall be measured during technical inspection.
9. Releasable payload cannot occupy the static payload bay(s).
10. Each Releasable Payload shall have one (1) flexible streamer attached to facilitate payload location and recovery
11. Streamers shall be colored such that they are highly visible against typical terrain.
12. Each streamer shall be 54 ± 6 inches long and 2.5 ± 0.5 inches wide. Spot check of streamer dimensions will be performed as required. If the streamer does not meet the dimensional requirements, the releasable payload score will be zeroed (0)
13. Streamers must be in a stored configuration prior to the drop and deploy before each releasable payload strikes the ground.
14. Streamers must remain attached to each releasable payload at all times. Attached is defined as being able to support the weight of the releasable payload.
15. Releasable payload shall be marked with the team number in three places, on the container, and both ends of the streamer with numbers 2-inches in height.

8.8 Static Payload Requirements

1. Static payload shall be in its own payload bay(s).
2. Static payload bay(s) shall be fully enclosed.
3. Static payload bay(s) shall have no restriction on size or shape.
4. Advanced Class may have multiple Static Payload bays

8.9 GYROSCOPIC AND OTHER STABILITY AUGMENTATION

Gyroscopic assist or other forms of stability augmentation are allowed in Advanced Class.

8.10 AUTONOMOUS FLIGHT

Autonomous flight systems that cause the aircraft to navigate without direct pilot control input are prohibited.

8.11 DATA ACQUISITION SYSTEM (DAS)

Advanced Class aircraft must have a Data Acquisition System (DAS) that shall record altitude.

1. Using a ground receiver station, the team must display the real-time altitude of the aircraft to the Payload Specialist and the flight judge.
2. Team must be able to automatically record the altitude of the aircraft at the moment they initiate the release of any Releasable Payload.
3. The DAS recording must be performed on the ground station and must support play back for review on demand.
4. Altitude must be measured in feet with display precision of at least one (1) ft.
5. DAS equipment on the aircraft must have an arming/reset switch. If a manual switch is used, it must be located externally at least 12 inches away from the propeller. A wireless arming/reset switch is allowed.
6. DAS systems shall not use the same 2.4 GHz channel as the flight control system, unless the telemetry being used is part of the radio control system being used. A DAS built into the radio control system must meet all DAS rules requirements.

8.12 FIRST PERSON VIEW SYSTEM (FPV)

Some type of First Person View (FPV) system is required to be used as a drop sighting device. FPV video and the required telemetry data for altitude must be transmitted to the ground station and be visible to the Payload Specialist and the flight judge.

1. Payload Specialist must be a team member and must use the video stream to verbally direct the pilot to the drop zone.
2. The primary pilot must fly visually only (no FPV goggles or ground station reference).
3. The FPV system must transmit a live real time video signal from the aircraft to the ground station. FPV and DAS data may be combined on the ground station display.
4. FPV systems CANNOT use the same frequency as the flight control system. Use of 2.4 GHz for FPV video is prohibited.

8.13 DAS AND FPV FAILURES

Any Das or FPV failures during the flight attempt are considered a missed flight attempt and get no points

Example: A team has flown four (4) rounds successfully and on the 5th round the aircraft takes-off successfully, makes a successful drop, but the DAS malfunctions. The flight attempt will NOT be considered a qualified flight and the team will receive zero (0) flight score for round 5.

Advanced class aircraft must have functioning DAS and FPV to be allowed to take off for an official flight.

8.14 PAYLOAD SPECIALIST

Advanced class aircraft must be able to drop the Releasable payload using a system commanded by the Payload Specialist.

1. The primary pilot cannot have access to or activate the Releasable Payload.
2. The Payload release must be manually activated by the Payload Specialist or by an automatic release system that is part of the aircraft electronics.
3. If an automatic Payload release system is used, it must have a manual override.
4. The Releasable Payload release cannot be controlled from or connected to the primary pilot's R/C transmitter in any way.
5. Teams may activate the payload release system using a second 2.4 GHz radio system or some other method based on their DAS or telemetry system.

8.15 LINK BUDGET FORMAT FOR SAE AERO DESIGN COMPETITION

Radio Link Budget should be used to establish the requirements for the advanced class FPV and DAS systems. Each system component needs to be described with enough detail to evaluate its effect on system performance.

The link budget form provided in the rules appendix is required to summarize the system parameters in the design report. Calculations for the 2.4GHz radio control systems are optional. Calculations for the FPV and DAS systems are required. An example link budget can be found in Appendix B.

8.16 FLIGHT & DROP PROCEDURES

1. Teams are allowed two drop attempts on the target. Teams may drop as many or as few releasable payloads as they wish during each drop attempt.
2. Advanced Class teams are allowed to drop their releasable cargo in the upwind or downwind directions or both.
3. Dropping direction shall be declared to the flight boss prior to takeoff and adhered to during flight operations. Stated direction will be recorded on the flight log.
4. To receive a flight score, the team shall release at least one successful payload.

A successful payload release is defined as the intentional, targeted drop of at least one releasable payload in the dropping direction indicated to the flight boss prior to takeoff. The payload does not necessarily have to land in the target zone but must meet all requirements after the drop. Altitude at release must be successfully recorded on the DAS.

Example 1:

A team states they will drop in one direction (upwind or downwind). They will get two attempts to position their aircraft in the proper direction. Each approach to the drop zone in the declared direction will be counted as a drop attempt.

Example 2:


A team states they will drop in both directions; upwind and downwind. Any approach to the drop zone is considered an attempt.

8.17 ADVANCE CLASS SCORING

In order to participate in the flight portion of the competition, each team is required to have submitted AND received a score for both Design Report and Oral Presentation. In addition, each team must have provided video demonstration of aircraft operational ability to SAE officials during Technical and Safety Inspection.

1. Zone Multiplier

The Zone Multiplier (Z_m) is the multiplier earned for each releasable payload successfully dropped in the respective drop zone.

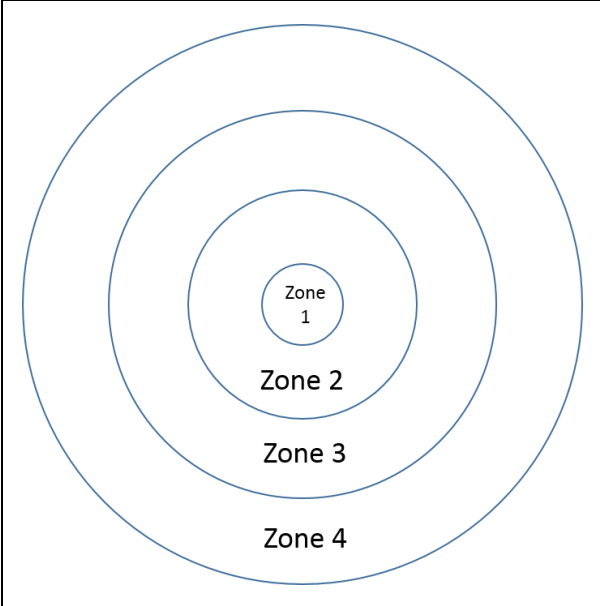	Zone	Range	Multiplier
	1	0 ft → 15 ft	1.00
	2	15 ft → 30 ft	0.75
	3	30 ft → 45 ft	0.50
	4	45ft → 60 ft	0.25
	OUTSIDE	60 ft +	0.00

2. Scoring Equation

$$Final\ Flight\ Score = \frac{1}{N} \sum_0^N FS - \sum T$$

Where:

$$FS = Flight\ Score = S_p + (S_p \times \sum Z_m)$$

$Z_m = Zone\ Multiplier$

$S_p = Static\ Payload\ (lbs)$

$T = Total\ Penalty\ Point\ Assessed\ throughtout\ the\ competition$

$N = Number\ of\ Rounds$

9 MICRO CLASS DESIGN REQUIREMENTS

Design Objectives:

The objective of Micro class is to design light-weight micro UAV style aircraft that can be quickly deployed from a small package. Reliability to perform the mission is measured by an operational availability bonus. The first assembly of the competition is a timed event. Payload fraction is still at the core of the class and will be considered as a measure of performance.

9.1 AIRCRAFT SYSTEMS REQUIREMENTS

1. Propulsion Requirements

Micro class aircraft are restricted to electric motor propulsion only.

2. Propeller and Gearbox

Gearboxes on a Micro class aircraft where the propeller RPM differs from the motor RPM are allowed. Multiple motors, multiple propellers, propeller shrouds, and ducted fans are allowed in Micro class.

3. Aircraft propulsion system battery

The maximum flight battery pack allowed for Micro class is a 3 cell 2200mAh lithium polymer battery pack. Batteries having less cells and lower capacity are permitted.

4. Gyroscopic Assist Allowed


Gyroscopic assist and other forms of stability augmentation are allowed in Micro class.

9.2 PAYLOAD REQUIREMENTS

1. Enclosed Payload Bay Interior Dimensions

Table 9.1 - Length Width Height Tolerance

Length	Width	Height	Tolerance
5.00"	1.50"	1.50"	+/- 0.100"

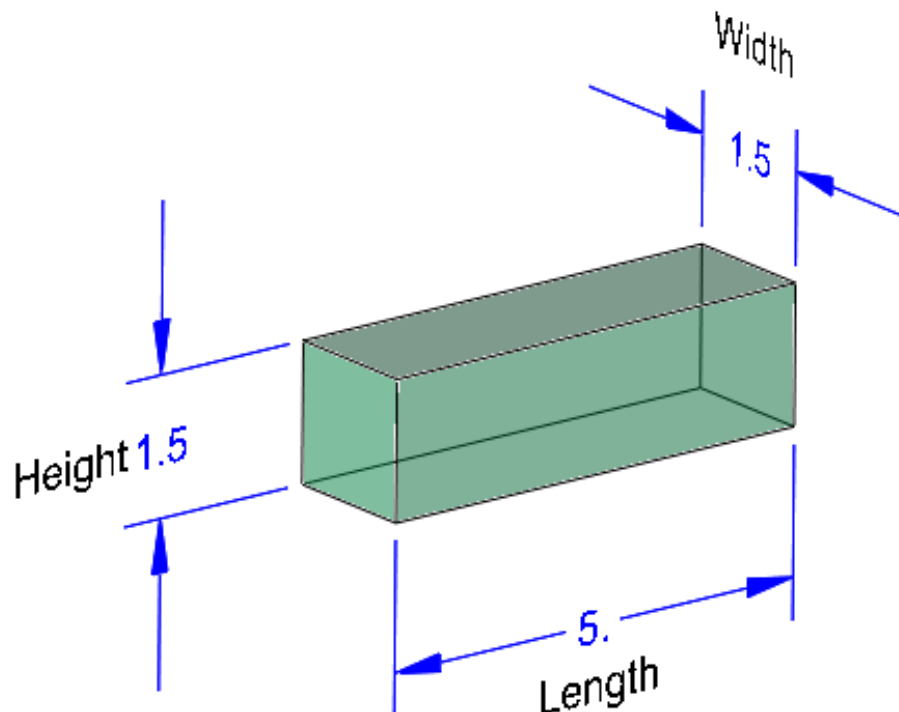

2. Payload Bay Requirements

Micro class aircraft must have a single fully enclosed payload bay with precision interior dimensional requirements. A fully enclosed payload bay is defined as having four sides, a bottom and a top.

1. A fully enclosed payload bay is defined as having four sides, a bottom and a top.
2. The payload bay must be fully enclosed within the aircraft and meet the precision dimension requirements above. (Table 9.1)
3. One or more surfaces of the payload bay must be removable for payload access and for inserting the official payload bay test block.
4. The interior surfaces of the payload bay must be smooth and unbroken (no lightening holes or visible gaps in and between surfaces).
5. The payload bay position may be adjusted forward and aft as needed.
6. No penetrations are allowed through the payload bay surfaces except for the payload support assembly.
7. The payload support assembly **MUST** be removable so that the payload bay test block can be inserted into the payload bay during technical inspection.
8. The removable payload support assembly will be considered as payload.
9. The payload bay is never considered as payload.
10. All payload carried for score must be carried within the payload bay.

3. Payload and Payload Supports

The payload must consist of a support assembly and payload plates. The payload must be secured to the airframe to ensure the payload will not shift or come loose in flight

1. There is no required configuration for the payload plates.
2. Teams must provide their own payload plates.
3. The support assembly must be constructed so as to retain the weights as a **homogeneous mass**. The design of the support assembly will depend upon the configuration of the payload plates.
4. The total payload consists of the payload plates plus the support assembly

9.3 MICRO CLASS AIRCRAFT LAUNCH

1. Hand launched (tossed)

The Micro class aircraft must be hand launched (tossed) by throwing the aircraft using one (1) hand grasping the aircraft.

1. Only one (1) member of the team can enter pre-marked launch zone.
2. The pilot must be outside the pre-marked launch zone during the tossing action.
3. The aircraft can only be tossed by one (1) team member.
4. The aircraft cannot be tossed by the pilot.
5. There is no limit on number of steps taken during the launching action, but the person must remain inside the launch zone before and after releasing the aircraft.

(continued)

2. Hand launched (tossed) violations

The following actions are not permitted and will invalidate the flight attempt and score for the round

1. Using more than one hand to toss the aircraft (continued)
2. Tossing the aircraft from any other part of the aircraft other than the fuselage
3. Running with the aircraft during launch
4. Pilot launching (tossing) the aircraft

9.4 MICRO CLASS AIRCRAFT HAND-LAUNCH SAFETY REQUIREMENTS

1. Safety Gear

Safety gear must be used by the designated team member performing the aircraft toss and any team member assisting with preparing the aircraft inside the launch zone.

Safety gear will consist of:

1. Safety Glasses
2. Hard hat

9.5 AIRCRAFT SYSTEM CONTAINER

1. Storage and Transport Container

Micro class aircraft must fit in a storage and transport container with size limitations. The required container may be either purchased or constructed. Compliance with the following requirements will be confirmed during technical inspection.

1. The aircraft container maximum outside diameter must measure no more than 6"
2. The fully packed aircraft container must weigh no more than 10 pounds (lbs).
3. The aircraft container must include a shoulder strap and a carrying handle.
4. The container must be one-man portable.
5. The aircraft container must have school name, team name and team number on the outside surface of the container.

2. Aircraft System Packaging General Requirements

The aircraft system container must contain the following:

1. All components of the flight ready aircraft including airframe, propulsion system battery, payload assembly, payload plates and any other part(s) required for flight must be packaged within the constraints of the aircraft system container.
2. The propulsion system battery must not be pre-installed in the aircraft
3. The red arming plug must not be pre-installed in the aircraft
4. The propulsion system battery must be contained in its own partitioned space in the aircraft system container.
5. The transmitter and any spare parts are not required to be in the aircraft system container.
6. If the aircraft uses a separate radio system battery, it may be pre-installed in its flight location. If the aircraft uses a radio system battery and a team elects not to pre-install it, then the radio system battery must be contained within its own partitioned space within the aircraft system container.

9.6 TIMED AIRCRAFT ASSEMBLY

1. Assembly Demonstration Bonus (Round 1 Only)

Assembly demonstration must consist of installation of the propulsion system battery at minimum. The timed Micro class assembly demonstration for Round 1 is optional. If a team elects to perform the demonstration, the Micro class aircraft must be assembled within the specified time-constraint in order to receive an assembly demonstration bonus. Aircraft assembly will be timed and scored during ROUND 1 only. The assembly demonstration bonus (B_{ad}) will be calculated per section 9.8.

1. The timed assembly demonstration can ONLY be performed during Round 1.
2. If the aircraft is not assembled within the specified time, the assembly demonstration bonus will be zeroed, and the team will have the option to move to the back of the line, finish assembly, and attempt a Round 1 flight.
3. The assembly demonstration is considered complete when all tasks required for flight have been performed with the exception of:
 1. Installing the Red Arming Plug,
 2. Performing preflight controls checks
 3. Hand launching the Micro class aircraft.
4. Performing preflight controls checks is limited to validation of adequate control movements and range. Disassembling the aircraft during the pre-flight control checks will invalidate the Aircraft Demonstration Bonus.
5. Teams may elect not to perform the assembly demonstration. If this is the case, there are no timed assembly requirements. The aircraft must be assembled but not armed prior to entering the launch zone. Micro class aircraft must be airborne within the specified time constraints in accordance with 6.4.2.
6. For Round 2 thru Round n : there are no timed assembly requirements. The aircraft must be assembled but not armed prior to entering the launch zone. Micro class aircraft must be airborne within the specified time constraints in accordance with Section 3.5
7. The Assembly Demonstration Bonus is only applicable if the ensuing flight is successful. A failed flight attempt in Round 1 will result in a zero Assembly Demonstration Bonus.

Note: Round 1 is defined as the first round on the first day of the competition, not the team's first attempt to fly at the competition.

9.7 MISSION REQUIREMENTS

1. Process for Assembly Demonstration Bonus

1. Two team members tasked with assembling the aircraft will be located immediately outside the launch circle in a designated area. At this time, the fully packaged, non-energized aircraft, with flight battery NOT installed, must be held over the shoulder using the required shoulder strap. (Failure to have the Red Arming Plug removed at this time will result in a zero bonus and a disqualified flight.)
2. The head judge give a “Go” command to begin assembly. Two scoring official will start the time
3. When the aircraft is fully assembled, with the flight battery installed, the team will give the “DONE” command to signal the timers to stop the timer.
4. After the “DONE” command is given by the assembling team, no further assembly may continue.
5. The official will inspect the aircraft to confirm aircraft flight ready status and record the time is recorded in seconds
6. Head judge will give the instruction to install the Red Arming Plug. (Any further assembly of the aircraft after the clock has stopped will result in zero for the bonus.)
7. The team will then step into the launch circle to begin their flight attempt. At this time, upon signal given by the Air Boss, a team will have 90 seconds (1.5 minutes) to accomplish a successful launch. During these 90 seconds, the pilot can do a final test on the controls. If the officials witness additional assembly after the clock has stopped, the assembly demonstration bonus will be zeroed.

2. Time Limit for Aircraft Launch

Micro class aircraft should be assembled prior to entering the launch zone.



1. Each team will have 90 seconds to complete preflight checks, energize the propulsion system, and check the controls and hand-launch the aircraft.
2. Only one takeoff launch attempt is permitted per round.

3. Aircraft Takeoff and circuit

Takeoff for Micro class is defined as the point at which the aircraft departs the hand of the person throwing the aircraft. Once takeoff occurs, Micro Class aircraft are required to:

1. Remain airborne and fly past the designated turn point before turning approximately 180 degrees in heading.
2. Flying past a second designated turn point, turning 180 degrees in heading,
3. Land in the designated landing zone for Micro class (see Micro class course diagram on next page).
4. Takeoff direction will be determined by the Air Boss, and normally selected to face into the wind.

Micro class course diagram

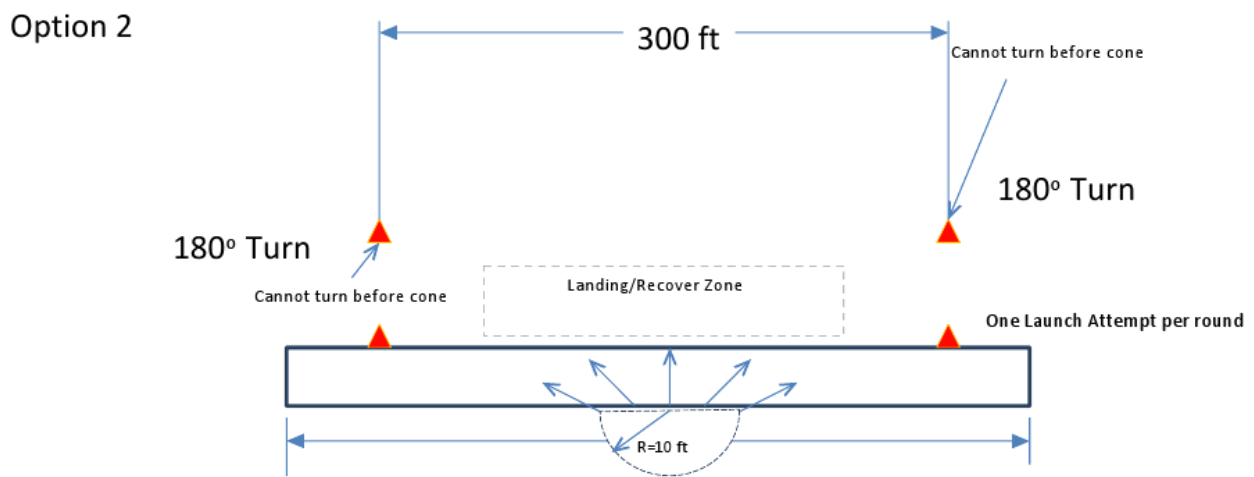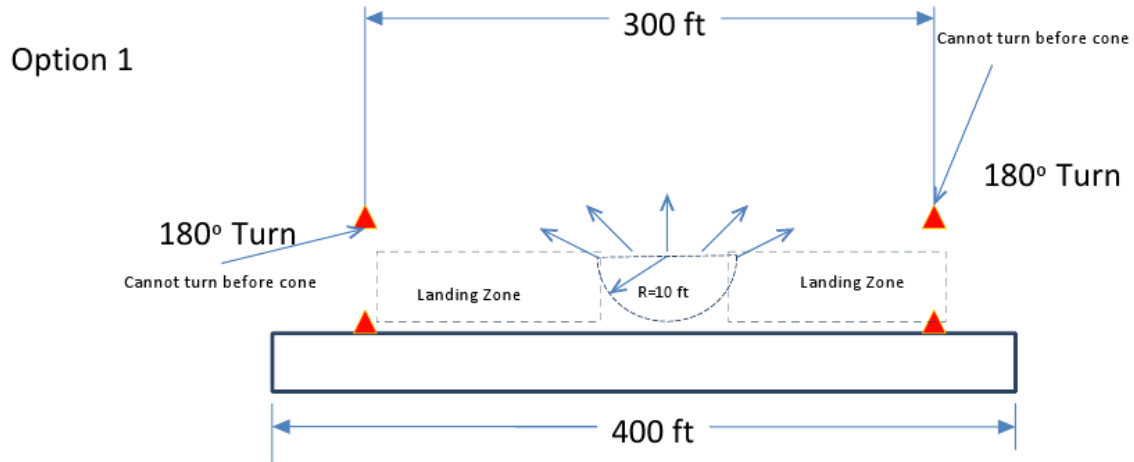

9.8 MICRO CLASS FLIGHT SCORING

Final Flight Score will be calculated in three parts: the average of successful flight round scores; the summation of operational availability bonus points; and the Round 1 timed assembly bonus score. This running calculation will be posted on the score board to determine team standings.

$$FFS = \text{Final Flight Score} = \left(\frac{1}{S} \sum_1^S FS_n \right) + \left(\sum_1^N B_{oa} \right) + (B_{ad})$$

Where:

Flight Score:

$$FS_n = (70 - L_{ac}) \times (2 \times PF)$$

Bonus for Operational Availability

$$B_{oa} = (5 \times PF)$$

Payload Fraction

$$PF = \text{Payload Fraction} = \frac{(W_{payload})}{(W_{payload} + W_{empty})}$$

Bonus for assembly demonstration

$$B_{ad} = (15 - 0.1t)$$

L_{ac} = Length of Aircraft Container

t = time recorded in seconds

S = total number of successful rounds flown

N = total number of rounds in the flight competition

10 POSSIBLE FUTURE RULE CHANGES

This section is intended to give teams advance notice of possible future changes to the SAE Aero Design rules. These changes might have a significant effect on the design of the aircraft. This is an informational notice only and does not imply that the proposed changes will in fact be adopted.

- Plan form parameters will change for 2017.
- One of the new metrics the rules committee is considering for the Micro class is to measure endurance. This may be incorporated in future Micro-Class Competition.
- The use of lock washers and nylon locking nuts are already popular and in use in the RC hobby may be included in future competitions.
- A standardized noise test may be incorporated into future competitions.
- Possible Advanced class engine change from internal combustion to an all-electric class

APPENDIX A

SAE AERO DESIGN

STATEMENT OF COMPLIANCE

Certification of Qualification

Team Name	_____	Team Number	_____
School	_____		
Faculty Advisor	_____		
Faculty Advisor's Email	_____		

Statement of Compliance

As Faculty Advisor, I certify that the registered team members are enrolled in collegiate courses. This team has designed, constructed and/or modified the radio controlled aircraft they will use for the SAE Aero Design 2013 competition, without direct assistance from professional engineers, R/C model experts or pilots, or related professionals.

Signature of Faculty Advisor

Team Captain Information:

Team Captain:
Captain's E-mail:
Captain's Phone:

Note:

A copy of this statement needs to be included in your Design Report as page 2 (Reference Section 4.2)

APPENDIX B

Advanced Class Tech-Data Sheet: Radio Link Budget

Supply data for each radio system used onboard aircraft. Expand number of columns as needed. Calculations for Radio control systems using 2.4GHz are optional.

Radio System Function (FPV, DAS, RC, Payload)	Units	FPV	DAS	RC	Payload
Operating Frequency, F	MHz				
Wavelength (WL) = $300 / F$ (MHz)	m				
Maximum Operating Range (Rng)	m				
Free Space Path Loss (Lfs) = $20\text{Log}(4\text{Pi} (\text{Rng} / \text{WL}))$	dB				
Transmitter Brand/Model					
Transmitter Power (Pt)	dBm				
Number of Transmitter Channels	---				
Transmit Antenna Gain (Gt)	dB				
Transmit Antenna Polarization (H, V, RHC, LHC)					
Transmit Losses (Lt)	dB				
Receive Losses (Lr)	dB				
Receive Antenna Gain (Gr)	dB				
Transmit Antenna Polarization (H, V, RHC, LHC)					
Processing Gain (Gpr)	dB				
Polarization Loss (Lpol)	dB				
Power Rcvd (Pr) = $Pt + Gt + Gr + Gpr - Lfs - Lt - Lr - Lpol$	dBm				
Receiver Signal Power Required Pmin.	dBm				
Signal Margin = $Pr - Pmin$	dB				

FPV Transmitter Operating Frequencies Available (MHz).

If your video transmitter or data-link is set to a fixed frequency which can be changed with a switch, please list the available frequencies to aid the event in reducing frequency conflicts. If your system is spread spectrum, list the range of frequencies on which it can operate.

Reference: https://en.Wikipedia.org/wiki/Link_budget

APPENDIX C

Micro Class Tech–Data Sheet: Weight Buildup

	Component	Weight (lb)
1		
2		
3		
4		
5		
6		
7		
8		
9		
10		
11		
12		
13		
14		
15		
16		
17		
18		
19		
20		
21		
22		
23		
24		
25		
26		
27		
28		
29		
30		
31		
32		
33		
34		
Total		

APPENDIX D

Engineering Change Request (ECR) and Penalty chart

Team Number:			
School Name:			
Team Name:			
Discovery Method	<input type="checkbox"/> Tech Inspection <input type="checkbox"/> Safety Inspection <input type="checkbox"/> Test Flight <input type="checkbox"/> Design Analysis	System Affected	<input type="checkbox"/> Wing (area +/-) <input type="checkbox"/> Fuselage (area +/-) <input type="checkbox"/> Horiz. Stabilizer (area +/-) <input type="checkbox"/> Vertical Tail (area +/-) <input type="checkbox"/> Engine Mount assembly
			<input type="checkbox"/> Mechanical <input type="checkbox"/> Landing System <input type="checkbox"/> Structural <input type="checkbox"/> Electronics (avionics) <input type="checkbox"/> Payload bay Assembly
Surface Area	AREA ADDED: _____ AREA REDUCED: _____ <i>If surface area was impacted by the modification, specify total area added or reduced. Show calculations:</i>		
Describe the Modification			
Reason for Modification			
Other Considerations			
*** OFFICIAL USE ONLY ***			
ECR #			
Penalty Applied			

Aero-Dynamic Changes							
Plan Form Area		Points		Structural Change (Pts Deducted)	Mechanical (Pts Deducted)	Electronic (Pts Deducted)	Misc (Pts Deducted)
Add (in ²)	Removed (in ²)	Add	Removed				
1		1	.5	4	3	3	2
2		1	.5	4	3	3	2
3		1	.5	4	3	3	2
4		1	.5	4	3	3	2
5		1	.5	4	3	3	2
6		2	1	4	3	3	2
7		2	1	4	3	3	2
8		2	1	4	3	3	2
9		2	1	4	3	3	2
10		4	2	4	3	3	2
11		4	2	4	3	3	2
12		4	2	4	3	3	2
13		4	2	4	3	3	2
14		4	2	4	3	3	2
15		6	3	4	3	3	2
16		6	3	4	3	3	2
17		6	3	4	3	3	2
18		6	3	4	3	3	2
19		6	3	4	3	3	2
20		8	4	4	3	3	2
21		8	4	4	3	3	2
22		8	4	4	3	3	2
23		8	4	4	3	3	2
24		8	4	4	3	3	2
25		10	5	4	3	3	2
26		10	5	4	3	3	2
27		10	5	4	3	3	2
28		10	5	4	3	3	2
29		10	5	4	3	3	2
30		12	6	4	3	3	2
31		12	6	4	3	3	2
32		12	6	4	3	3	2
33		12	6	4	3	3	2
34		12	6	4	3	3	2
35		14	7	4	3	3	2
36		14	7	4	3	3	2
37		14	7	4	3	3	2
38		14	7	4	3	3	2
39		14	7	4	3	3	2
40+		14	7	4	3	3	2

Page two of two

APPENDIX E

APPEALS

Team Name	
Team Captain	
Collateral Points	<p><i>All appeals will require the team to post twenty five (25) points as collateral. If the appeal is successful and the action is reversed, the team will not forfeit the twenty five (25) collateral points. If the appeal is overruled, the team will forfeit the twenty five (25) collateral points</i></p> <p>Collateral Points: <input style="width: 40px; text-align: center;" type="text" value="25"/></p> <p>Sign if Agree: _____</p>
Reason for this Appeal	
Rule Reference	<p><i>List the section(s) in the official rule that is (are) in conflict with the action(s) taken by competition official</i></p> <p>Section: _____ Section: _____</p> <p>Section: _____ Section: _____</p>
Desire outcome	

APPENDIX F

SAE Technical Standards

The SAE Technical Standards Board (TSB) has made the following SAE Technical Standards available on line, **at no cost**, for use by Collegiate Design teams. Standards are important in all areas of engineering and we urge you to review these documents and to become familiar with their contents and use.

The technical documents listed below include both (1) standards that are identified in the rules and (2) standards that the TSB and the various rules committees believe are valuable references or which may be mentioned in future rule sets.

All Collegiate Design Series teams registered for competitions in North America have access to all the standards listed below - including standards not specific to your competition.

SAE Technical Standards included in the CDS Rules

Baja SAE

J586 - Stop Lamps for Use on Motor Vehicles Less Than 2032 mm in Overall Width

J759 - Lighting Identification Code

J994 - Alarm - Backup – Electric Laboratory Tests

J1741 - Discriminating Back-Up Alarm Standard

Clean Snowmobile Challenge

J192 - Maximum Exterior Sound Level for Snowmobiles

J1161 - Sound Measurement – Off-Road Self-Propelled Work Machines Operator-Work Cycle

Formula Hybrid

J1318 - Gaseous Discharge Warning Lamp for Authorized Emergency, Maintenance and Service Vehicles

J1673 - High Voltage Automotive Wiring Assembly Design

Formula SAE

SAE 4130 steel is referenced but no specific standard is identified

SAE Grade 5 bolts are required but no specific standard is identified

Supermileage

J586 - Stop Lamps for Use on Motor Vehicles Less Than 2032 mm in Overall Width

SAE Technical Standards for Supplemental Use

Standards Relevant to Baja SAE

J98 – Personal Protection for General Purpose Industrial Machines – Standard

J183 – Engine Oil Performance and Engine Service Classification - Standard

J306 – Automotive Gear Lubricant Viscosity Classification - Standard

J429 – Mechanical and Material Requirements for Externally Threaded Fasteners – Standard

J512 – Automotive Tube Fittings - Standard

J517 – Hydraulic Hose - Standard

J1166 – Sound Measurement – Off-Road Self-Propelled Work Machines Operator-Work Cycle

J1194 – Rollover Protective Structures (ROPS) for Wheeled Agricultural Tractors

J1362 – Graphical Symbols for Operator Controls and Displays on Off-Road Self-Propelled Work Machines - Standard

J1614 – Wiring Distribution Systems for Construction, Agricultural and Off-Road Work Machines

J1703 - Motor Vehicle Brake Fluid - Standard

J2030 – Heavy Duty Electrical Connector Performance Standard

J2402 – Road Vehicles – Symbols for Controls, Indicators and Tell-Tales – Standard

Standards Relevant to Clean Snowmobile Challenge

J44 – Service Brake System Performance Requirements – Snowmobiles - Recommended Practice

J45 – Brake System Test Procedure – Snowmobiles – Recommended Practice

J68 – Tests for Snowmobile Switching Devices and Components - Recommended Practice

J89 – Dynamic Cushioning Performance Criteria for Snowmobile Seats - Recommended Practice

J92 – Snowmobile Throttle Control Systems – Recommended Practice

J192 – Maximum Exterior Sound Level for Snowmobiles - Recommended Practice

J288 – Snowmobile Fuel Tanks - Recommended Practice

J1161 – Operational Sound Level Measurement Procedure for Snowmobiles - Recommended Practice

J1222 – Speed Control Assurance for Snowmobiles - Recommended Practice

J1279 – Snowmobile Drive Mechanisms - Recommended Practice

J1282 – Snowmobile Brake Control Systems - Recommended Practice

J2567 – Measurement of Exhaust Sound Levels of Stationary Snowmobiles - Recommended Practice

Standards Relevant to Formula SAE

J183 – Engine Oil Performance and Engine Service Classification - Standard

J306 – Automotive Gear Lubricant Viscosity Classification - Standard

J429 – Mechanical and Material Requirements for Externally Threaded Fasteners – Standard

J452 - General Information – Chemical Compositions, Mechanical and Physical Properties of SAE

Aluminum Casting Alloys – Information Report

J512 – Automotive Tube Fittings - Standard

J517 – Hydraulic Hose - Standard

J637 – Automotive V-Belt Drives – Recommended Practice

J829 – Fuel Tank Filler Cap and Cap Retainer

J1153 - Hydraulic Cylinders for Motor Vehicle Brakes – Test Procedure

J1154 – Hydraulic Master Cylinders for Motor Vehicle Brakes - Performance Requirements - Standard

J1703 - Motor Vehicle Brake Fluid - Standard

J2045 – Performance Requirements for Fuel System Tubing Assemblies - Standard

J2053 – Brake Master Cylinder Plastic Reservoir Assembly for Road Vehicles – Standard

Standard Relevant to Formula Hybrid

J1772 – SAE Electric Vehicle and Plug in Hybrid Conductive Charge Coupler

Standard Relevant to all CDS Competitions

J1739 – Potential Failure Mode and Effects Analysis in Design (Design FMEA) Potential Failure Mode and Effects Analysis in Manufacturing and Assembly Processes (Process FMEA) and Potential Failure Mode and Effects Analysis for Machinery (Machinery FMEA)